


PD100B - 100 MHz balanced photodetector




Koheron PD100B is an InGaAs amplified balanced detector with 39 kV/A gain, 100 MHz bandwidth and a common mode rejection ratio of 35 dB. Available in AC and DC coupled versions, the PD100B is ideal for applications such as Optical Coherence Tomography and Lidar sensing.

Specifications

	PD100B-AC	PD100B-DC
Wavelength range	900 - 1700 nm	900 - 1700 nm
Small signal bandwidth	160 Hz - 100 MHz at 3 dB	0 - 100 MHz at 3 dB
Coupling	AC	DC
Power supply (positive)	6 - 15 V _{DC}	6 - 15 V _{DC}
Power supply (negative)	-15 to -6 V _{DC}	-15 to -6 V _{DC}
Optical input power	0 - 1.5 mW	0 - 1.5 mW
Transimpedance gain	39 kV / A	39 kV / A
Output voltage range	±3 V	±3 V
CMRR at 1 MHz	35 dB	35 dB
Noise Equivalent Power	8 pW / √Hz (at 10 MHz)	8 pW / √Hz (at 10 MHz)
DC cutoff frequency (3 dB)	160 Hz	N.A.
Output impedance	50 Ω	50 Ω
Outside Dimensions	63 mm x 38 mm x 14 mm	63 mm x 38 mm x 14 mm
Photodiode connector	FC	FC
Photodiode active diameter	300 μm	300 μm
Outputs	SMA	SMA
Mechanical details	Compatible with M6 metric breadboards (25 mm spacing)	Compatible with M6 metric breadboards (25 mm spacing)


Functional diagram

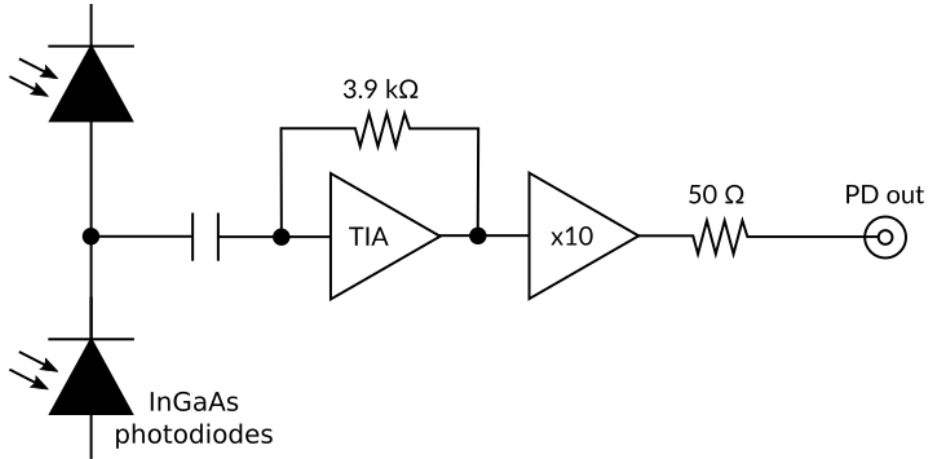


Characterization

Output power spectral density

The power spectral density of the PD100B output was measured for different incident optical powers. The indicated power is the incident power per photodiode. The PD100B output is directly connected to the spectrum analyzer (Tektronix RSA306). Optical source is a [Koheron LD100 laser](#) at 1550 nm.

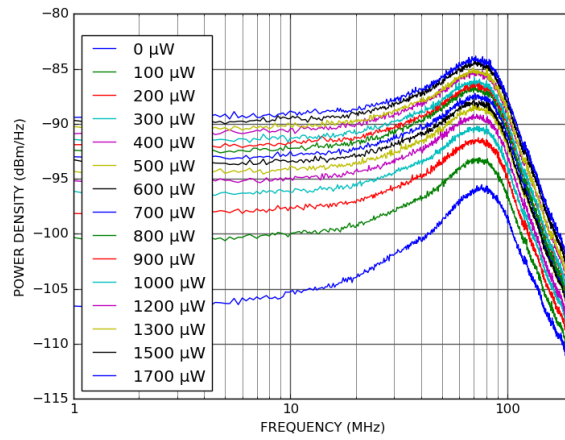


DC-coupled PD100B output power density

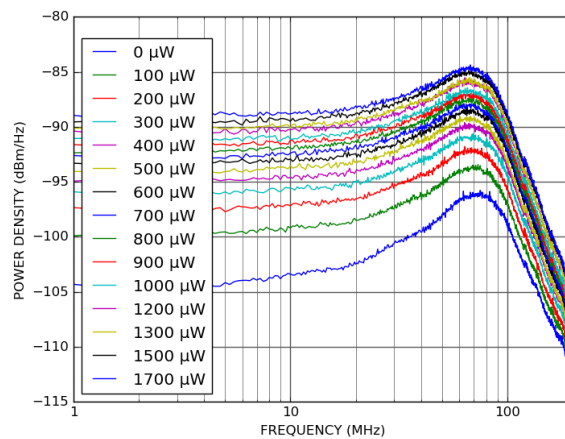


AC-coupled PD100B output power density

Common mode rejection ratio

When properly balanced, the common mode rejection ratio (CMRR) at 1 MHz of the PD100B is 35 dB. To maximize the CMRR care should be taken not only to balance the optical powers, but also the path length between the two channels.

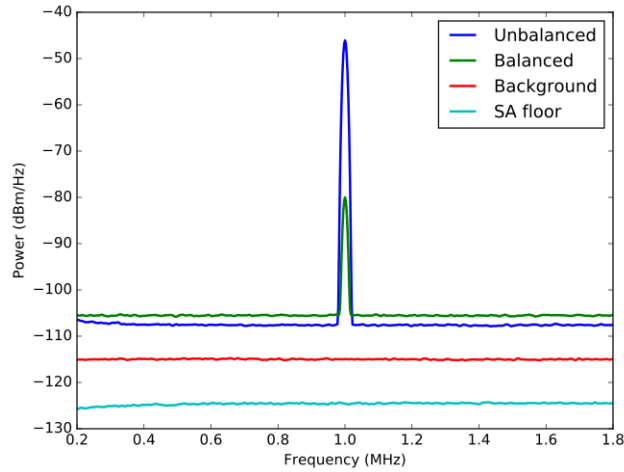

Frequency response

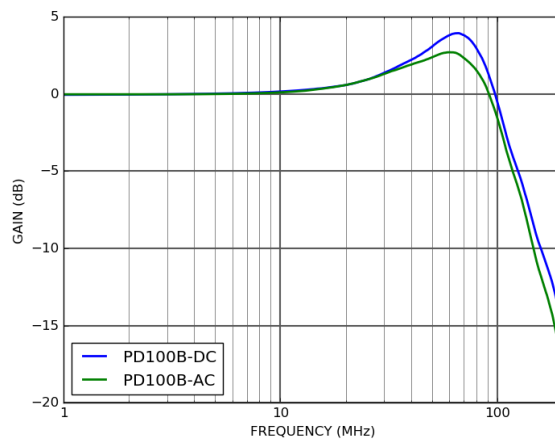

Noise equivalent power

